


# M.E.C. MINI V BELT® OIL STAT® FTD CUT SIDES ONLY

Discount Ref. 09 Group B5

M.E.C. MINI V BELT® OIL STAT® FTD :


- Oil resistant
- Resistant to temperatures from – 30° to + 80° C
- Conductive
- Anti-dust

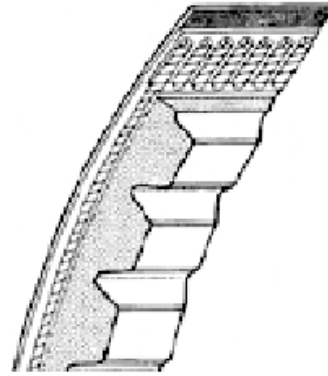

Minimum supply : 100 pcs per measure for models 5W and 6Y and 25 pcs for model 8T

## Belt sections

Section code	Section	≈b <sub>o</sub> (mm)	≈h (mm)
6	5/W	5	3
7	6/Y	6	4
8	8/T	8	5



## Belt identification

M.E.C. MINI V BELT® OIL STAT® FTD belts are identified by a letter which specifies the section (e.g. Y = 6x4 ) and by a number which shows the rated outside length

### SECTION “5W” (5 x 3 mm )

Type and outside length	Rated inside length mm
W 180 FTD*	160
W 290 FTD*	270
W 300 FTD*	280
W 320 FTD*	300
W 335 FTD*	315
W 342 FTD*	322
W 355 FTD*	335
W 360 FTD*	340
W 372 FTD*	352
W 395 FTD*	375
W 420 FTD*	400
W 445 FTD*	425
W 470 FTD*	450
W 550 FTD*	530
W 580 FTD*	560
W 620 FTD*	600

### SECTION “6Y” (6 x 4 mm )

Type and outside length	Rated inside length mm
Y 295 FTD*	270
Y 305 FTD*	280
Y 325 FTD*	300
Y 340 FTD*	315
Y 360 FTD*	335
Y 365 FTD*	339
Y 377 FTD*	352
Y 400 FTD*	375
Y 425 FTD*	400
Y 450 FTD*	425
Y 475 FTD*	450
Y 520 FTD*	495
Y 555 FTD*	530
Y 585 FTD*	560
Y 625 FTD*	600
Y 875 FTD*	850

### SECTION “8T” (8 x 5 mm )

Type and outside length	Rated inside length mm
T 190 FTD*	160
T 310 FTD*	280
T 330 FTD*	300
T 345 FTD*	315
T 352 FTD*	322
T 370 FTD*	340
T 385 FTD*	355
T 405 FTD*	375
T 430 FTD*	400
T 480 FTD*	450
T 525 FTD*	495
*T 560 FTD*	530
*T 630 FTD*	600

\*Until stocks last