


M.E.C. FLAT TRANSMISSION BELT® 2-3-4-5-6-7-8

32 ounce ply flat belts

Discount Ref. 14 Group I8

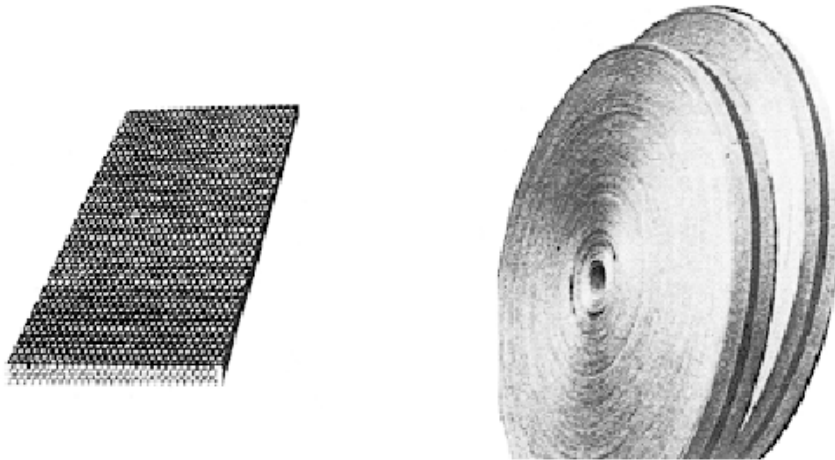

These are made in 32 ounce cotton fabric with rubberised fabric overlaid with a sheet of rubber in the centre and outer surfaces in a light hazelnut colour.

The edges are cut and finished and the outer plies are impregnated with resin ; for special usage, they can be left untreated.

Joining is by means of hot vulcanisation or stapling using metal staples.

USE :

As belts : for normal low, medium and high power transmissions of limited peripheral speed.

As conveyors : for any kind of internal handling at normal temperature of materials, loose or otherwise, as long as they are not oily.

There are also suitable for bucket elevators and belt conveyors running on metal, wood and laminated plastics.

CHARACTERISTICS :

Type code	N. Plies	Rated tot. Thickness mm	Theoretical weight per m ² /Kg	Max. allowable work Load Kg/width cm
1	2	3	2,4	12
2	2 (outer coarse plies)	3	2,4	12
3	3	4	3,6	18
4	3 (outer coarse plies)	4	3,6	18
5	4	5,8	5	24
6	5	7,3	6,4	30
7	6	9	7,8	36
8	7	11	9,2	42
9	8	12,5	10,6	48

Max. operating temperature : 50° C

RECOMMENDED MINIMUM PULLEY DIAMETERS

- 2-ply 50 mm
- 3-ply 100 mm
- 4-ply 150 mm
- 5-ply 200 mm
- 6-ply 250 mm
- 7-ply 350 mm
- 8-ply 450 mm

M.E.C. FLAT TRANSMISSION BELT® 2-3-4-5-6-7-8 □

32 ounce ply flat belts

Price per linear metre (for intermedite sizes the price of the next higher width has to be applied)

Width
20
30
40
50
60
70
80
90
100
110
120
130
140
150
160
170
180
190
200
250
300
350
400
450
500

Ring closure by means of vulcanization : a sum equal price of 3 mt of belt will be charged. □

N.B. for long lengths smaller than 20 mt. - 10% increase. □

Price/mt € for whole rolls of 100 mm or 1200 □

1000
1200