

M.E.C. MINI V BELT OIL STAT FT BELTS only raw edges


M.E.C. MINI V-BELT OIL STAT FT V-belts

- A) Resistant to oil
- B) Resistant to temperatures from - 30° to + 70° C
- C) Electro-conductive
- D) Anti-dust

Minimum supply: 100 pieces for measurement 5W and 6Y and 25 pieces for 8T

The M.E.C. MINI V-BELT OIL STAT FT belts are identified by a letter which specifies the section (e.g. Y = 6x4) and by a number which shows the rated outside length.

Sections	≈b, mm	≈h mm
5/W	5	3
6/Y	6	4
8/T	8	5
10/Z	10	6

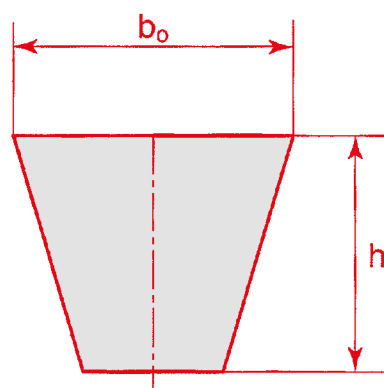

M.E.C. MINI V-BELT OIL STAT FT

SECTION "5W" (5 x 3 mm)

Type	Rated inside Length mm
W 205 FT	185
W 210 FT	190
W 250 FT	229
W 256 FT	236
W 280 FT	260
W 285 FT	265
W 290 FT	270
W 300 FT	280
W 307 FT	287
W 320 FT	300
W 323 FT	303
W 335 FT	315
W 342 FT	322
W 350 FT	330
W 355 FT	335
W 360 FT	340
W 365 FT	345
W 370 FT	350
W 378 FT	358
W 395 FT	375
W 426 FT	406
W 440 FT	420
W 445 FT	425
W 455 FT	435
W 460 FT	441
W 485 FT	465
W 490 FT	471
W 495 FT	475
W 515 FT	495
W 520 FT	500
W 535 FT	514
W 574 FT	554
W 620 FT	600

SECTION "6Y" (6 x 4 mm)

Type	Rated inside Length mm
Y 265 FT	240
Y 275 FT	250
• Y 285 FT	260
• Y 290 FT	265
• Y 295 FT	270
Y 305 FT	280
Y 325 FT	300
Y 345 FT	320
Y 352 FT	327
Y 355 FT	330
Y 360 FT	335
Y 375 FT	350
Y 377 FT	352
• Y 385 FT	360
Y 395 FT	370
Y 397 FT	372
Y 400 FT	375
Y 405 FT	380
Y 425 FT	400
Y 450 FT	425
Y 475 FT	450
Y 500 FT	475
Y 525 FT	500
Y 565 FT	540
Y 575 FT	550
Y 605 FT	580
Y 625 FT	600
Y 665 FT	640
Y 700 FT	675
Y 875 FT	850
Y 925 FT	900

SECTION "8T" (8 x 5 mm)

Type	Rated inside Length mm
T 310 FT	280
T 345 FT	315
T 360 FT	330
T 365 FT	335
T 385 FT	355
T 405 FT	375
T 430 FT	400
T 440 FT	410
T 455 FT	425
T 460 FT	430
T 480 FT	450
T 505 FT	475
T 560 FT	530
T 590 FT	560
T 610 FT	580
T 630 FT	600
T 660 FT	630
T 700 FT	670
T 710 FT	680
T 730 FT	700
T 740 FT	710
T 747 FT	717
T 780 FT	750
T 830 FT	800
T 860 FT	830
T 880 FT	850
• T 905 FT	875
T 930 FT	900
• T 980 FT	950
• T 1030 FT	1000

SECTION "10Z" (10 x 6 mm)

Type	Rated inside Length mm
Z 400 FT	362
Z 475 FT	437
Z 1000 FT	962

• Dimensions until stocks last

M.E.C. MINI V BELT OIL STAT FTD BELTS notched raw edges


M.E.C. MINI V BELT OIL STAT FTD:

- A) Resistant to oil
- B) Resistant to temperatures from - 30° to + 80° C
- C) Electro-conductive
- D) Anti-dust



The M.E.C. MINI V BELT OIL STAT FTD belts are identified by a letter which specifies the section (e.g. Y = 6x4) and by a number which shows the rated outside length.

Section	≈b. mm	≈h mm
5/W	5	3
6/Y	6	4
8/T	8	5

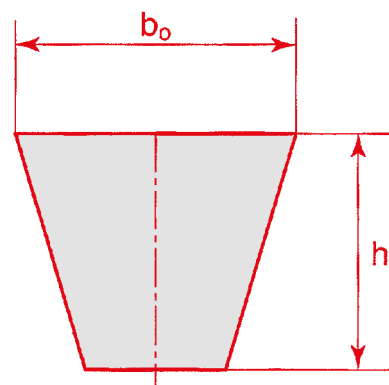

SECTION "5W" (5 x 3 mm)

Type	Rated inside length mm
W 180 FTD	160
W 290 FTD	270
W 300 FTD	280
W 320 FTD	300
W 335 FTD	315
W 342 FTD	322
W 355 FTD	335
W 360 FTD	340
W 372 FTD	352
W 395 FTD	375
W 420 FTD	400
W 445 FTD	425
W 470 FTD	450
W 550 FTD	530
W 580 FTD	560
W 620 FTD	600

SECTION "6Y" (6 x 4 mm)

Type	Rated inside length mm
Y 295 FTD	270
Y 305 FTD	280
Y 325 FTD	300
Y 340 FTD	315
•Y 360 FTD	335
Y 365 FTD	339
Y 377 FTD	352
Y 400 FTD	375
Y 425 FTD	400
Y 450 FTD	425
Y 475 FTD	450
Y 520 FTD	495
Y 555 FTD	530
Y 585 FTD	560
Y 625 FTD	600
Y 875 FTD	850

SECTION "8T" (8 x 5 mm)

Type	Rated inside length mm
T 190 FTD	160
T 310 FTD	280
T 330 FTD	300
T 345 FTD	315
T 352 FTD	322
T 370 FTD	340
T 385 FTD	355
T 405 FTD	375
T 430 FTD	400
T 480 FTD	450
T 525 FTD	495
T 560 FTD	530
T 630 FTD	600

- End of stock measurements